


CONDUCTED EMISSION 0.15 - 30 MHz

EUT: IMX6 REX
 Manuf: Voipac
 Op Cond: Ui=230VAC, OS Linux
 Operator: Turiak Jan
 Test Spec: EN 55022/2010, Class B
 Comment: Power cable L1
 XP Power, VEP36US12

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamplifier	OpRge
150k	30M	5k	10k	PK+AV	5ms	AUTO	LN OFF	60dB

Final Measurement:	x QP / + AV	Transducer No.	Start	Stop	Name
Meas Time:	1 s	1	9k	30M	ESH3_Z2
Subranges:	16				
Acc Margin:	20dB				

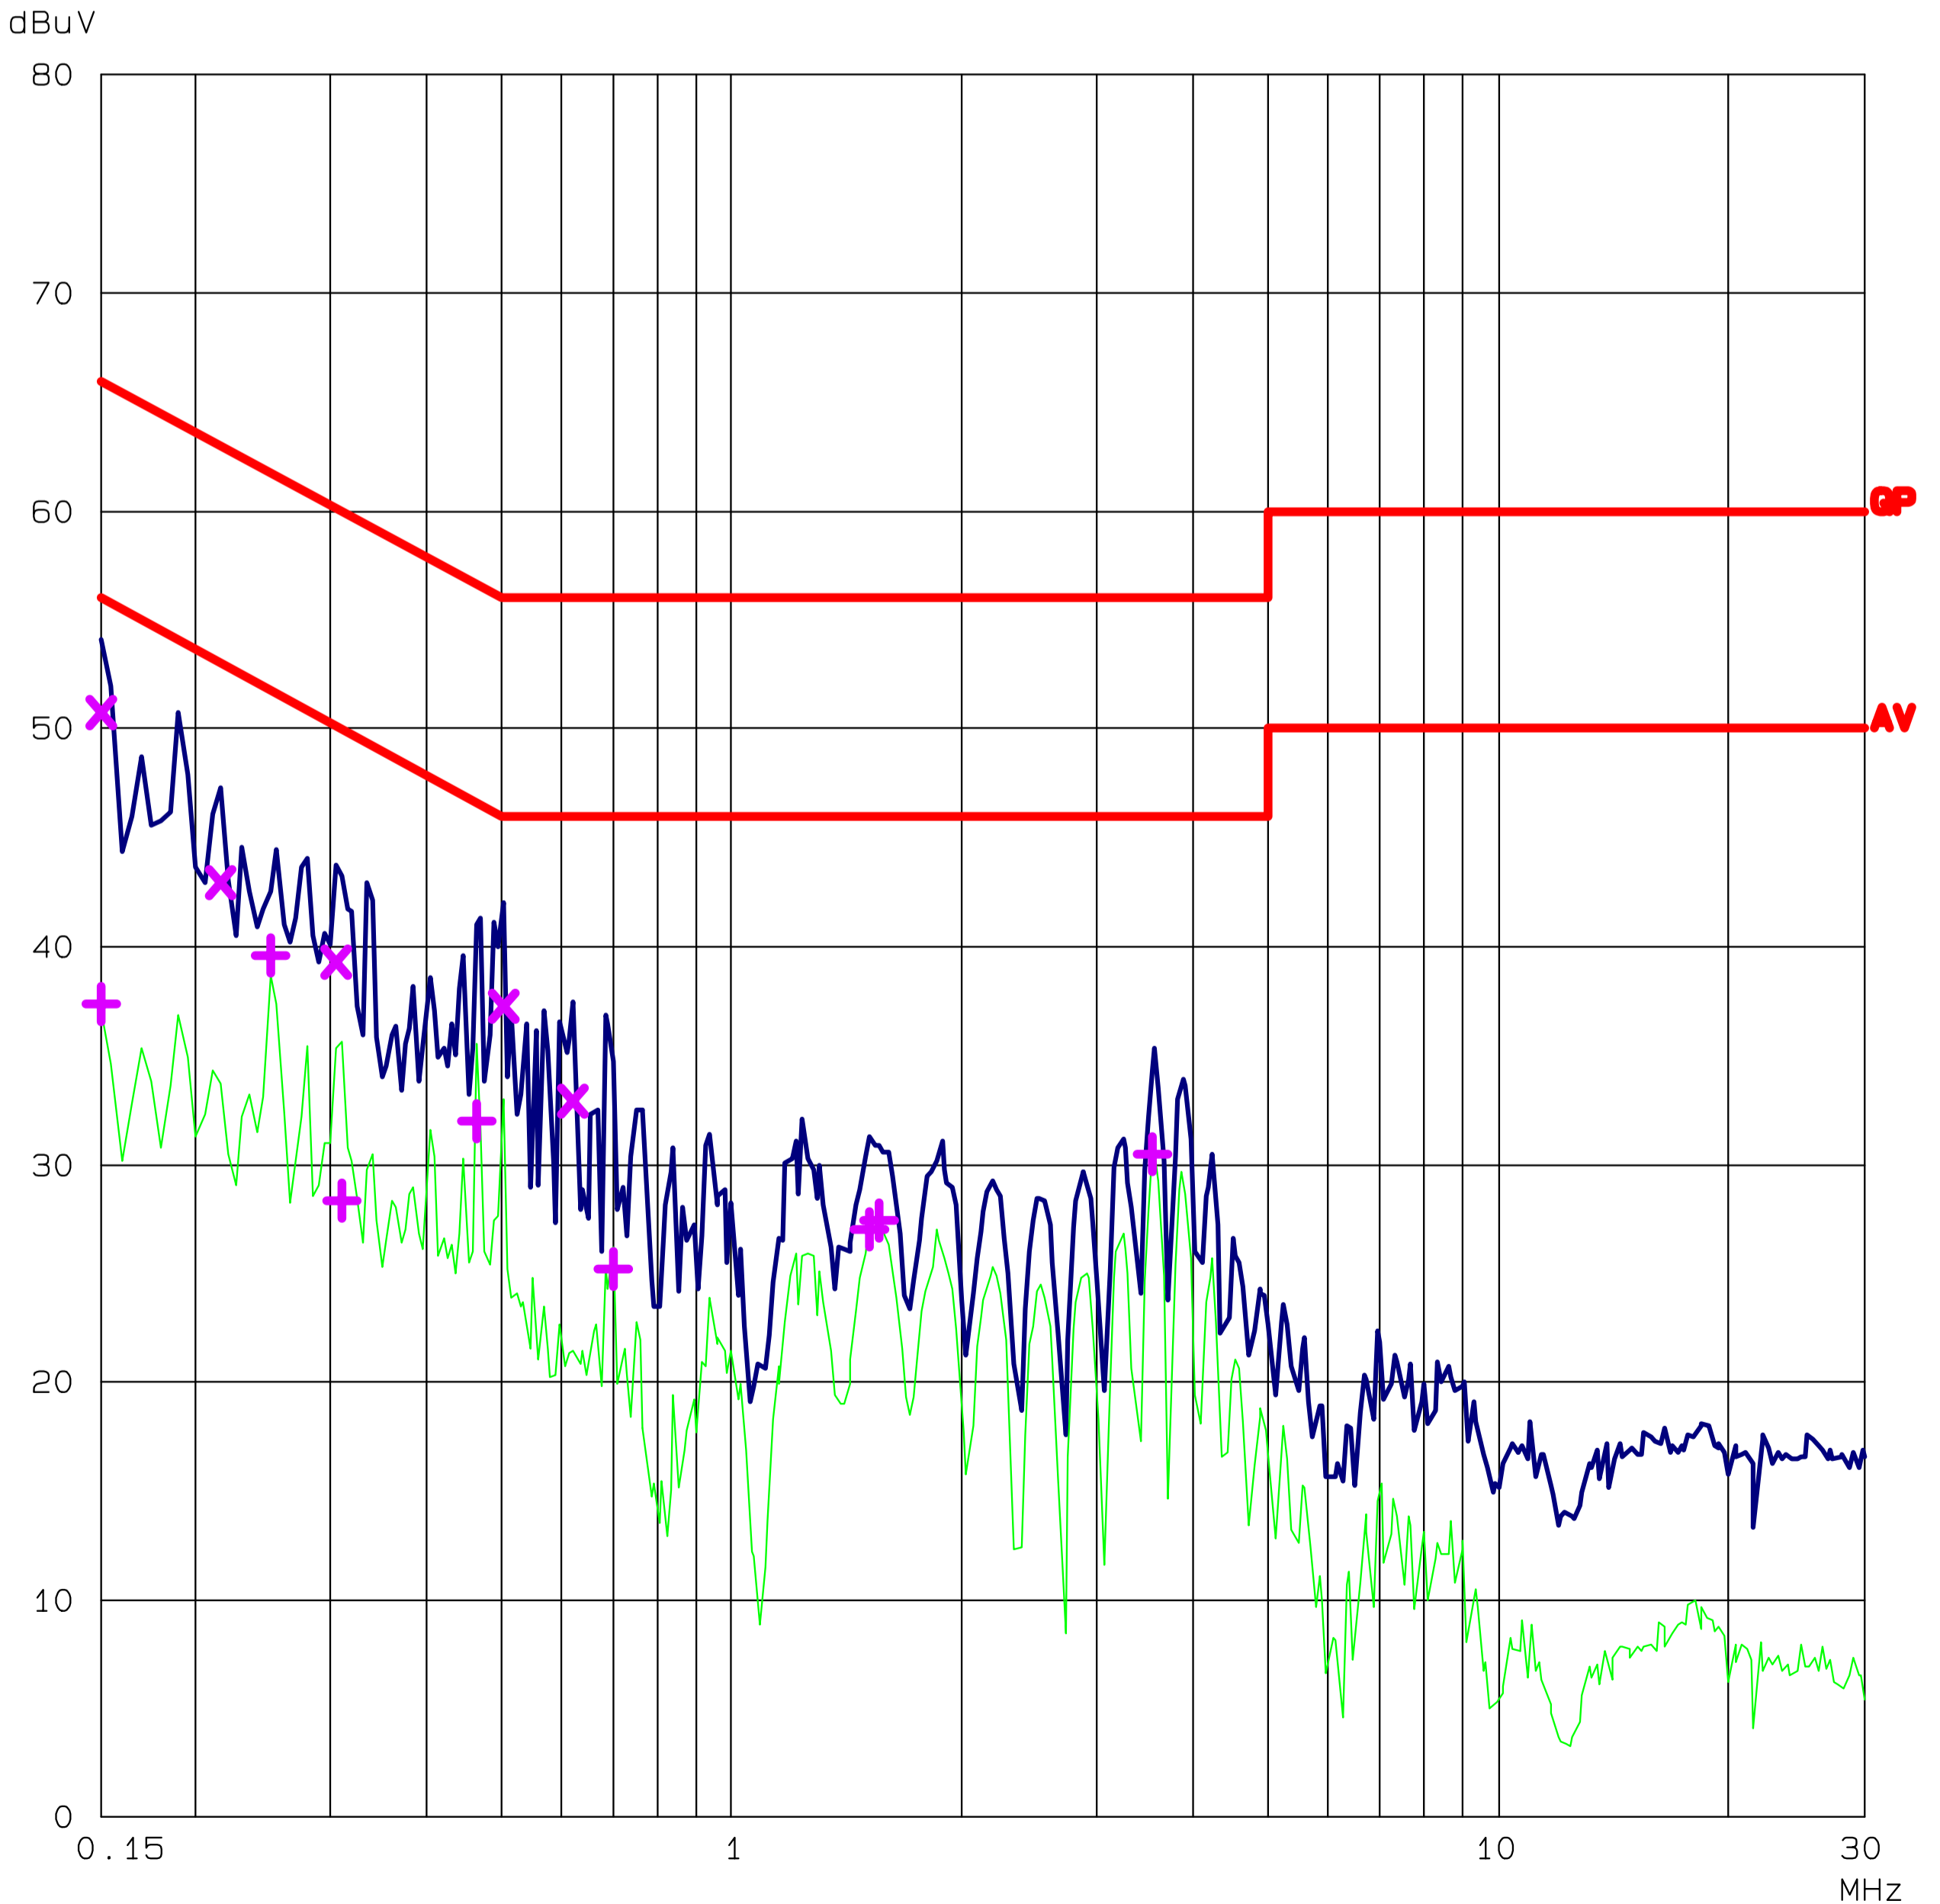

CONDUCTED EMISSION 0.15 - 30 MHz

EUT: IMX6 REX
 Manuf: Voipac
 Op Cond: Ui=230VAC, OS Linux
 Operator: Turiak Jan
 Test Spec: EN 55022/2010, Class B
 Comment: Power cable L1
 XP Power, VEP36US12

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	5ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.15000	50.7	66.0
0.21500	42.9	63.0
0.30500	39.3	60.1
0.50500	37.3	56.0
0.62000	32.9	56.0

Frequency MHz	AV Level dBuV	AV Limit dBuV
0.15000	37.4	56.0
0.25000	39.6	51.8
0.31000	28.3	50.0
0.46500	31.9	46.6
0.70000	25.1	46.0
1.51500	27.0	46.0
1.55500	27.4	46.0
3.54000	30.5	46.0

* limit exceeded