


# CONDUCTED EMISSION 0.15 - 30 MHz

EUT: IMX6 REX  
 Manuf: Voipac  
 Op Cond: Ui=230VAC, OS Linux  
 Operator: Turiak Jan  
 Test Spec: EN 55022/2010, Class B  
 Comment: Power cable N  
 XP Power, VEP36US12

## Scan Settings (1 Range)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150k	30M	5k	10k	PK+AV	5ms	AUTO	LN	OFF 60dB	

Final Measurement:	x QP / + AV	Transducer No.	Start	Stop	Name
		1	9k	30M	ESH3_Z2
Meas Time:	1 s				
Subranges:	16				
Acc Margin:	20dB				

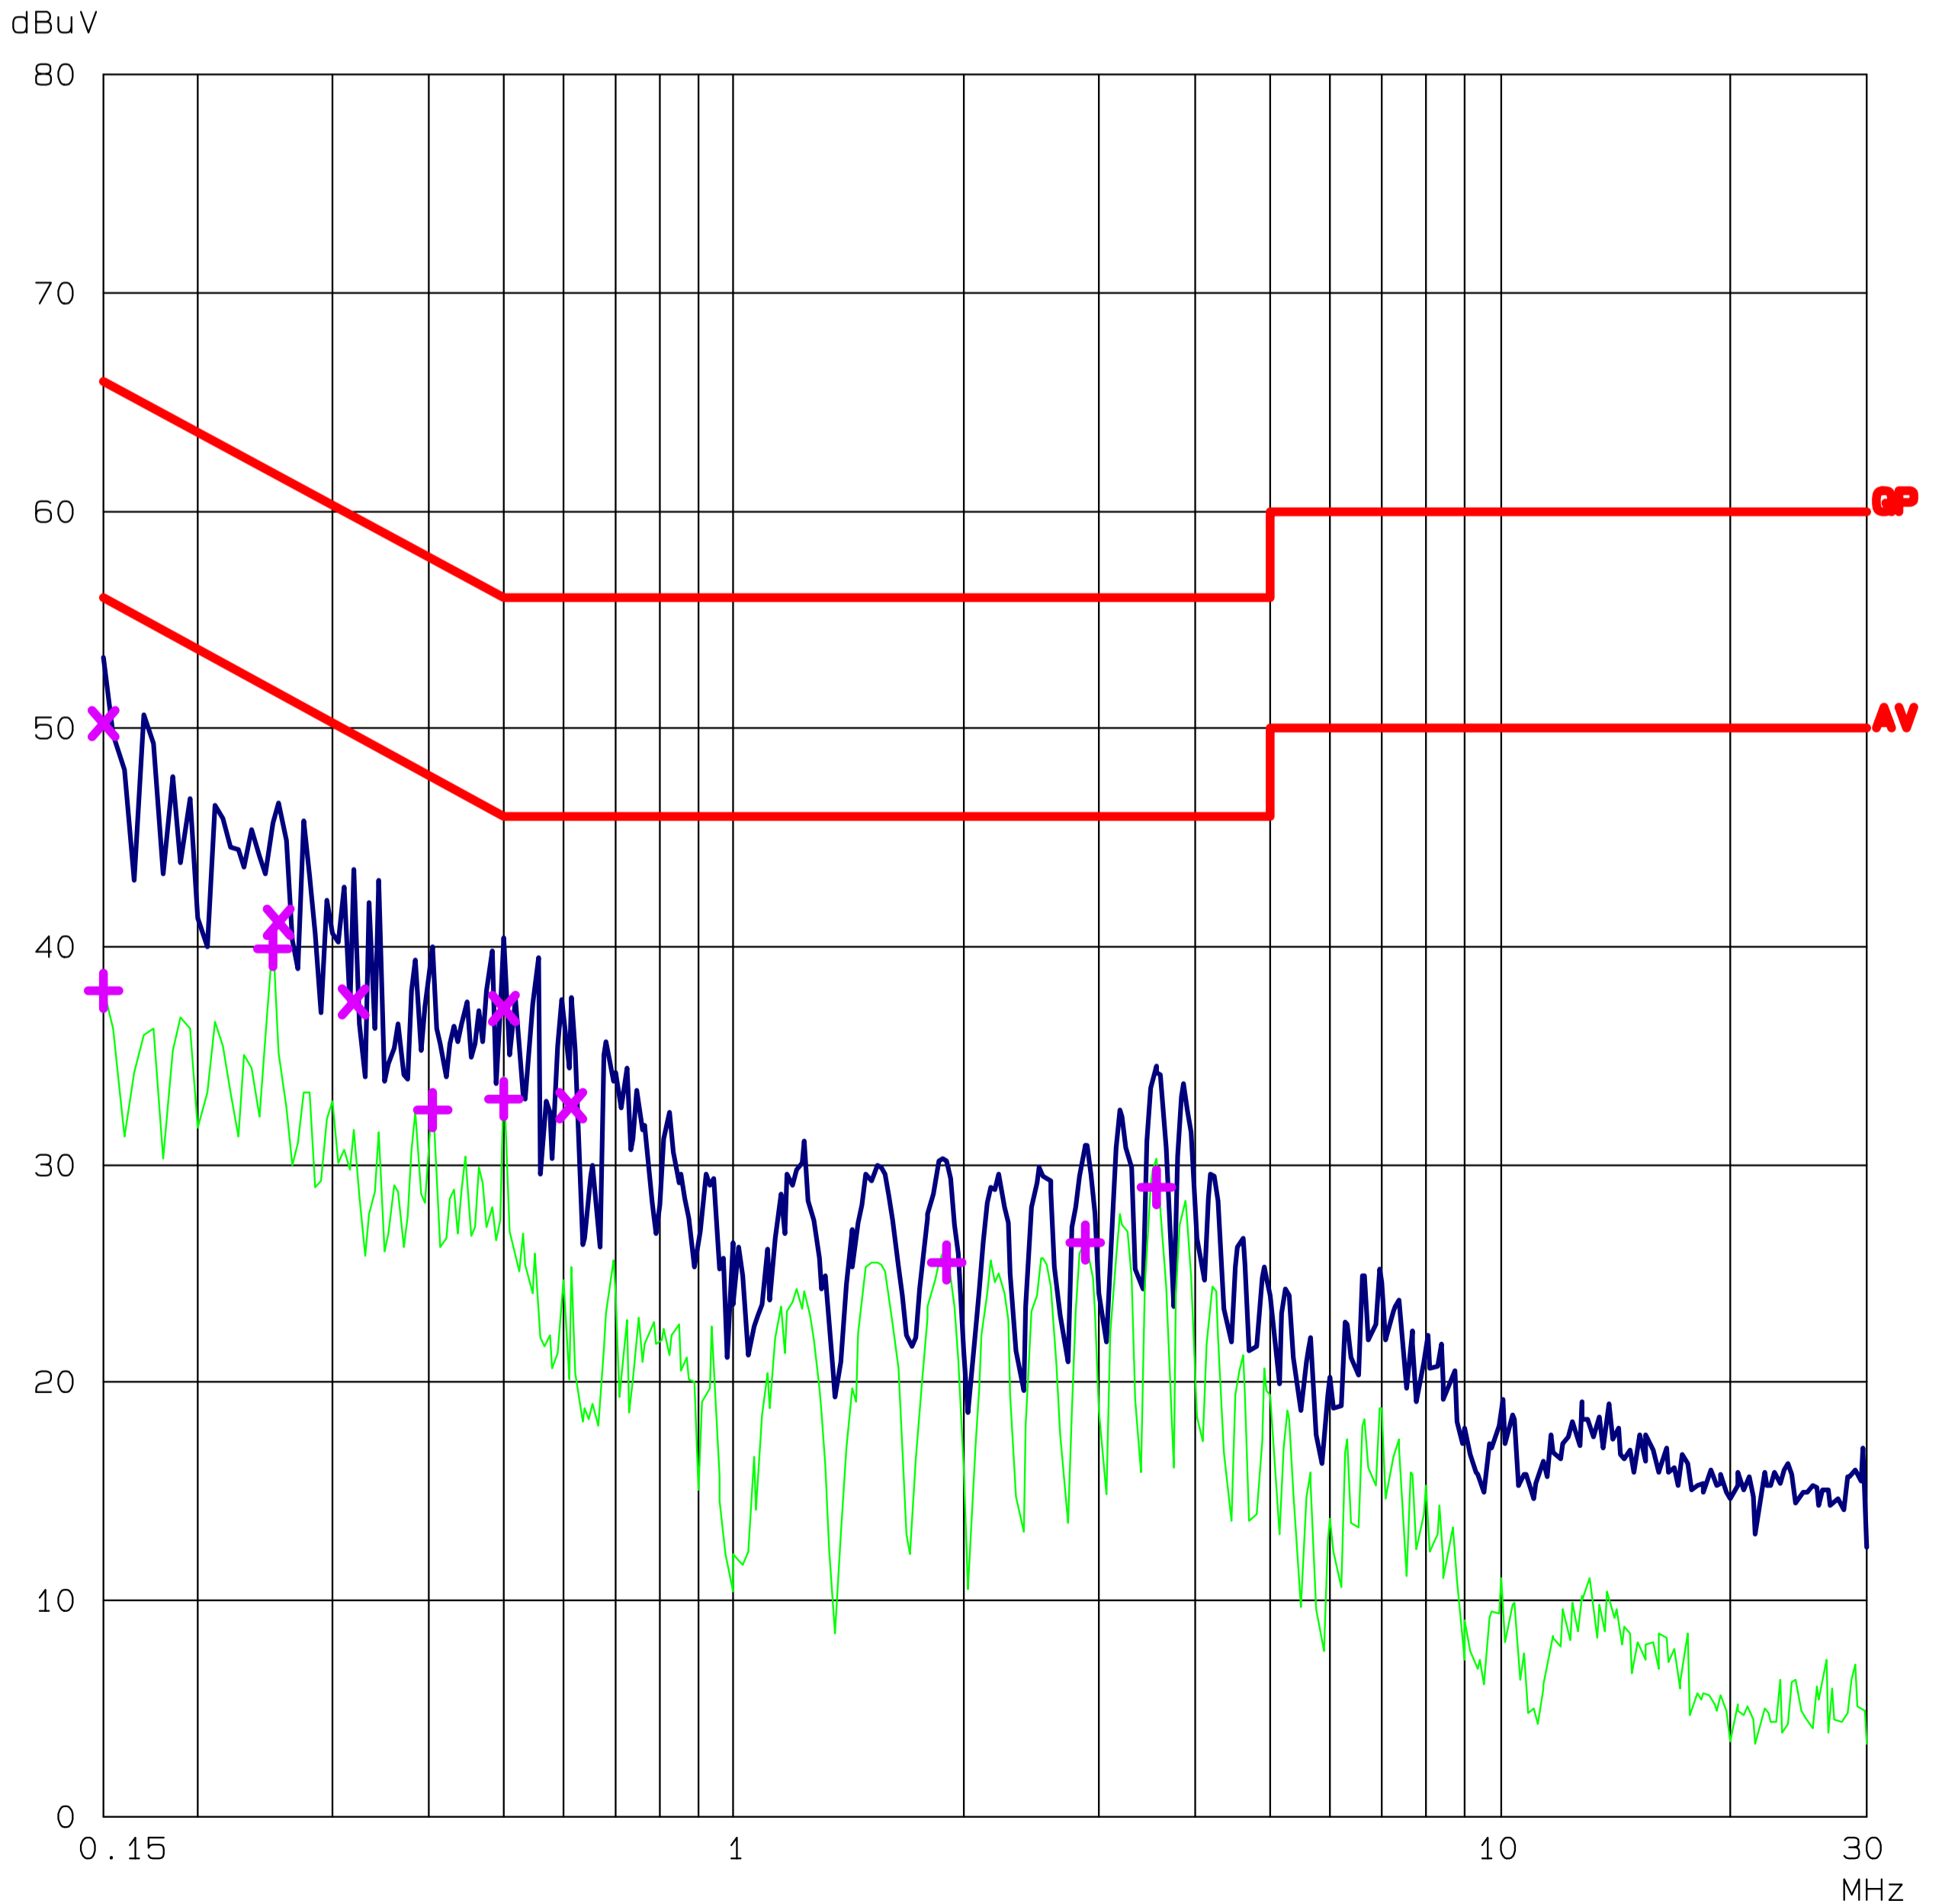

CONDUCTED EMISSION 0.15 - 30 MHz

EUT: IMX6 REX  
 Manuf: Voipac  
 Op Cond: Ui=230VAC, OS Linux  
 Operator: Turiak Jan  
 Test Spec: EN 55022/2010, Class B  
 Comment: Power cable N  
 XP Power, VEP36US12

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	5ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.15000	50.2	66.0
0.25500	41.1	61.6
0.32000	37.4	59.7
0.50000	37.1	56.0
0.61500	32.6	56.0

Frequency MHz	AV Level dBuV	AV Limit dBuV
0.15000	37.9	56.0
0.25000	39.9	51.8
0.40500	32.4	47.8
0.50000	33.0	46.0
1.89500	25.4	46.0
2.87000	26.4	46.0
3.57000	28.9	46.0

\* limit exceeded